arXiv:astro-ph/0403259v1 10 Mar 2004

LISA Measurement of Gravitational Wave Background Anisotropy: Hexadecapole Moment via a Correlation Analysis

Naoki Seto and Asantha Cooray

Theoretical Astrophysics, MC 130-33,
California Institute of Technology, Pasadena, CA 91125
E-mail: (seto,asante)@tapir.caltech.edu

We discuss spatial fluctuations in the gravitational wave background arising from unresolved Galactic binary sources, such as close white dwarf binaries, due to the fact the galactic binary source distribution is anisotropic. We introduce a correlation analysis of the two data streams of the Laser Interferometer Space Antenna (LISA) to extract spherical harmonic coefficients, in an independent manner, of the hexadecapole moment ($l = 4$) related to the projected two-dimensional density distribution of the binary source population. The proposed technique complements and improves over previous suggestions in the literature to measure the gravitational wave background anisotropy based on the time modulation of data as LISA orbits around the Sun. Such techniques, however, are restricted only to certain combinations of spherical harmonic coefficients of the galaxy with no ability to separate them individually. With LISA, $m = 2, 3$ and 4 coefficients of the hexadecapole ($l = 4$) can be measured with signal-to-noise ratios at the level of 10 and above in a certain coordinate system. In addition to the hexadecapole coefficients, when combined with the time modulation analysis, the correlation study can also be used, in principle, to measure quadrupole coefficients of the binary distribution.

PACS numbers: PACS number(s): 95.55.Ym 04.80.Nn, 98.62.Sb

I. INTRODUCTION

In addition to gravitational waves from massive black holes at cosmological distances, the Laser Interferometer Space Antenna (LISA; [1]) is expected to detect the galactic binary source background, such as close white dwarf binaries, with gravitational waves at frequencies between 0.1 mHz to 100 mHz [2]. At frequencies above 3 mHz, LISA will resolve a large number of galactic binaries [3], while at the low frequency end, the unresolved population will form a confusion background of gravitational waves. This background is expected to be anisotropic given the fact that galactic binaries trace the density distribution of our galaxy such that the cumulative gravitational wave flux is expected to be concentrated towards the highest density regimes such as the disk and the bulge of the Milky Way. As LISA orbits around the Sun, its response will be sensitive to different regions on the sky and one expects the data stream to modulate as a function of time. This modulation, in return, can be used to extract information related to the density distribution and to reconstruct the anisotropy of the gravitational wave background [4, 5, 6]. Note that the binary background can be considered as both a source of noise or a signal; For example, by treating the background as a signal, we can attempt to obtain certain information related to the Galactic structure through anisotropies of the background [4, 5, 6]. On the other hand, if the background is treated as a source of noise, we might also discuss how anisotropies affect the data analysis and consider certain strategies to minimize any impact [7].

Here, we treat the background as a signal and consider the presence of anisotropies and their potential measurement using a correlation between the two data streams of LISA. For this purpose, following Ref. [7], we introduce a spherical harmonic moment analysis of LISA data in terms of spatial inhomogeneities in the two-dimensional projected density distribution when integrated over the observer to source distance. We also emphasize the subtle use of a freedom related to data combinations that also corresponds to an effective rotation angle of LISA detectors in the detector plane. The technique we discuss here compliments, and improves, studies based on the time modulation of the data stream and allows one to extract individual coefficients of multipole moments related to the two-dimensional binary source distribution; Prior techniques were only restricted to combinations of coefficients related to the monopole ($l = 0$), quadrupole ($l = 2$), and the hexadecapole ($l = 4$). Considering LISA observational parameters, we show that certain coefficients of the hexadecapole multipole moments can be extracted with signal-to-noise ratios at the level of 10 and above.

We also study the complimentary nature of the two methods involving time modulation and the correlation of data streams and suggest that, in combination, one can also, in principle, extract information related to coefficients of the quadrupole distribution. The only multipole moment coefficients that will remain individually undetermined are ones of $l = 0$,$m = 0$ mode (monopole) and the $l = 2, m = 0$ mode related to the quadrupole. These two, however, can be determined, in combination, as a sum. The correlation analysis would be one of the crucial elements for LISA's follow-on missions aiming to detect weak gravitational wave background from the early universe [8, 9]. While it is expected that the basic design of any potential missions in the long term is likely to be largely different from that of LISA, the correlation analysis with LISA data streams may present an important first step for any planned studies in the future that attempt to use similar procedures to both extract signals or to remove foreground noise.

The discussion is organized as follows: in the next Section, we outline the spherical harmonic formulation of the anisotropies in the gravitational wave background and how the low order moments, $l = 0, 2$ and 4, are related to the LISA data streams. In Section 3, we discuss the correlation between data streams as a way to extract information related to these anisotropies beginning with a brief discussion of prior proposed techniques related to modulations in the data streams. In Section 4, We conclude with a summary of our main results. For background information related to the technique presented in this paper, we refer the reader to Ref. [7].

II. FORMULATION

In this section, we first discuss the measurement of gravitational wave background with LISA detectors briefly and then discuss how this data is related to the density distribution of the binary background, in terms of the spherical moments of inhomogeneities in the projected distribution on the sky. For the purpose of this discussion, we make use of the signal matrix involving the two data streams.

A. Detector Response

At the low frequency regime of the LISA band, two separate modes, (A, E), in gravitational waves can be independently measured such that the laser frequency noise is reduced to a level below other detector noises. Furthermore, individual detector noises for these two modes do not correlate [10]. We write these two data streams d_I $(I = A, E)$, made with detector noise n_I^D, when the response to gravitational waves, h_I, as $d_I = h_I + n_I^D$. We define the detector noise spectrum S_{IJ}^D as $\left\langle n_I^{D*}(f) n_J^D(f') \right\rangle = \delta(f - f') S_{IJ}^D(f)/2$. The frequency dependence on noise is almost irrelevant for the present discussion and, hereafter, we omit the explicit dependence for notational simplicity. Since the noise in two modes are uncorrelated and have same magnitude due to the symmetric data combinations, we have the following relation for the detector noise spectrum matrix

$$S_{AA}^D = S_{EE}^D, \quad S_{AE}^D = 0. \tag{2.1}$$

The responses h_I to the low frequency gravitational waves for two modes $(I = A, E)$ can be essentially regarded as that of two 90°-interferometers rotated by 45° from each other, as shown in Fig. 1. To describe gravitational wave measurements, we take a reference coordinate system (X_D, Y_D, Z_D) from the detector system, where the Z_D-axis is normal to the detector plane. The gravitational waves behave as a Spin-2 field such that one can make linear combinations $[d_A(\phi_f), d_E(\phi_f)]$ from the original modes $[d_A, d_E]$ with a two dimensional rotation matrix $R(\phi)$ as

$$\begin{pmatrix} d_A(\phi_f) \\ d_E(\phi_f) \end{pmatrix} = R(2\phi_f) \begin{pmatrix} d_A \\ d_E \end{pmatrix}. \tag{2.2}$$

These new modes $[h_A(\phi_f), h_E(\phi_f)]$ are equivalent to the responses of two 90°-interferometers that are obtained by rotation of the original modes (h_A, h_E) with an angle ϕ_f around the Z_D-axis. Based on this transformation, one can easily confirm following relations for the detector noise spectrum for an arbitrary rotational angle

$$S_{AA}^D(\phi_f) = S_{EE}^D(\phi_f) = S_{AA}^D = S_{EE}^D, \quad S_{AE}^D(\phi_f) = 0. \tag{2.3}$$

As we discuss later, this freedom related to the effective rotation (or data combination) is important for the measurement of anisotropies related to the galactic gravitational wave background.

The signal matrix S_{IJ}^B for the galactic binary background is defined as in the case of detector noise and is given by the three-dimensional spatial distribution of gravitational-wave emitting binaries, ρ, when integrated over the volume, as

$$S_{IJ}^B = P \int d^3\boldsymbol{r} \rho(\boldsymbol{r}) r^{-2} F_{IJ}(\theta, \phi), \tag{2.4}$$

where P is a normalization factor that is not important for our analysis. The weighing factor r^{-2} in the integral is related to the fact that the gravitational wave amplitude scales as r^{-1}, where r is the radial distance from the detector. Here, we assume that the frequency distribution and the spatial distribution of galactic gravitational wave emission rate are independent. The functions F_{IJ} represent the dependence of the detector's response on the source direction, and are defined as

$$F_{IJ} = \frac{1}{2}\left[\left(\frac{1+\cos^2\theta}{2}\right)^2 p_1 + (\cos\theta)^2 p_2\right]. \tag{2.5}$$

with $(p_1, p_2) = (\cos^2 2\phi, \sin^2 2\phi)$ for F_{AA}, $(p_1, p_2) = (\sin^2 2\phi, \cos^2 2\phi)$ for F_{EE}, and $(p_1, p_2) = (\sin 2\phi \cos 2\phi, -\sin 2\phi \cos 2\phi)$ for F_{AE}. Using a spherical coordinate we can express Eq. (2.4) as [4]

$$S^B_{IJ} = \int d\Omega B(\theta,\phi) F_{IJ}(\theta,\phi), \tag{2.6}$$

where the angular dependence of the gravitational wave background luminosity $B(\theta,\phi)$ is defined through the radial integral as

$$B(\theta,\phi) \equiv P \int dr \rho(r,\theta,\phi). \tag{2.7}$$

Note the dependence on r^{-2} factor in Eq. 2.4 is removed due to the $r^2 dr$ factor involved in the $d^3\boldsymbol{r}$ integral. Thus, the projected two dimensional structure of the density distribution, as seen by gravitational waves, is simply proportional to the column density of the binary population; this is also proportional to the radial distance averaged density profile and, roughly speaking, the function $B(\theta,\phi)$ can be regarded as the optical luminosity distribution on the sky. As before, one can relate the signal matrix under a rotation such that $S^B_{IJ}(\phi_f) = R(2\phi_f) S^B_{IJ} R(-2\phi_f)$ for the new data combination of $[d_A(\phi_f), d_E(\phi_f)]$.

B. Spherical Harmonic Expansion

As shown in Fig. 1, the noise matrix S^B_{IJ} is determined by the orientation of the coordinate system $K_D; (Z_D, Y_D, Z_D)$ which changes with the rotation of LISA. Given this, we consider the spherical harmonic expansion under a fixed coordinate system $K_0; (X_0, Y_0, Z_0)$ since such a fixed system can aid in analyzing the gravitational wave background [5, 6]. In this system, we set the (X_0, Y_0)-plane on the ecliptic and take X_0-axis in the direction of the autumn equinox from the Sun. This is a reasonable choice considering the LISA configuration [1, 7]. The two systems K_D and K_0 are related by the Euler angles (α, β, γ). Here (α, β) is the direction of the Z_D-axis in the fixed K_0 system, while γ is essentially degenerate with the freedom related to ϕ_f-rotation in Eq.(2.2) around the Z_D-axis. Therefore, we use the angle γ hereafter as an independent variable that can be varied.

The angular dependence of the gravitational wave intensity $B(\theta,\phi)$ can be decomposed with spherical harmonic moments $Y_{lm}(\theta,\phi)$ (with the angular variables in the K_0 system) as

$$B(\theta,\phi) = \sum_{l,m} B_{lm} Y_{lm}(\theta,\phi). \tag{2.8}$$

Here, harmonic coefficients B_{lm} are given as

$$B_{lm} = \langle lm | B \rangle \,, \tag{2.9}$$

where we have used the traditional notation for the inner product $\langle a|b\rangle \equiv \int d\Omega a^*(\theta,\phi) b(\theta,\phi)$, and an abbreviation $|lm\rangle \equiv |Y_{lm}(\theta,\phi)\rangle$. Our goal in this subsection is to write down the matrix $S^B_{IJ}(\alpha,\beta,\gamma)$, in the moving K_D frame that is characterized by the Euler angles (α,β,γ), with coefficients B_{lm} related to the background density distribution.

First, the matrix $S^B_{IJ}(\alpha,\beta,\gamma)$ is formally expressed as

$$S^B_{IJ}(\alpha,\beta,\gamma) = \left\langle F_{IJ}(\theta,\phi) | U(\alpha,\beta,\gamma)^{-1} | B(\theta,\phi) \right\rangle , \tag{2.10}$$

where $U(\alpha,\beta,\gamma)$ is the rotation operator related to Euler angles α, β and γ. After some tedious but straight forward algebra (see, the Appendix A of Ref. [7] for details), we write

$$\begin{aligned}
S^B_{AA} &= \frac{2\sqrt{\pi}}{5} B_{00} + \frac{4\sqrt{\pi}}{7\sqrt{5}} \sum_m D^2_{0m} \mathrm{Re}[e^{im\alpha} B_{2m}] + \frac{\sqrt{\pi}}{105} \sum_m D^4_{0m} \mathrm{Re}[e^{im\alpha} B_{4m}] + \frac{2\sqrt{\pi}}{3\sqrt{70}} \sum_m D^4_{4m} \mathrm{Re}[B_{4m} e^{(4\gamma+m\alpha)i}] \,, \\
S^B_{EE} &= \frac{2\sqrt{\pi}}{5} B_{00} + \frac{4\sqrt{\pi}}{7\sqrt{5}} \sum_m D^2_{0m} \mathrm{Re}[e^{im\alpha} B_{2m}] + \frac{\sqrt{\pi}}{105} \sum_m D^4_{0m} \mathrm{Re}[e^{im\alpha} B_{4m}] - \frac{2\sqrt{\pi}}{3\sqrt{70}} \sum_m D^4_{4m} \mathrm{Re}[B_{4m} e^{(4\gamma+m\alpha)i}] \,, \\
S^B_{AE} &= \frac{2\sqrt{\pi}}{3\sqrt{70}} \sum_m D^4_{4m} \mathrm{Im}[B_{4m} e^{(4\gamma+m\alpha)i}] \,.
\end{aligned} \tag{2.11}$$

As written, the two data streams from LISA detectors are only sensitive to the background B_{lm} with $l = 0, 2$ and 4 harmonics. This is simply due to the angular dependence of the $F_{IJ}(\theta, \phi)$ term such that $\langle F_{IJ}|lm\rangle$ is only non-zero when $l = 0, 2$ and 4. Unlike electromagnetic radiation observations, such as say that of photons in the cosmic microwave background, where, in principle, all multipole moments of the inhomogeneous radiation field is measurable, with gravitational waves, one is only restricted to these low order moments of the underlying field due to the poor directional characterization of the gravitational wave detectors. One can potentially extract additional multipole moments of the gravitational wave background with more data combinations involving, say, an additional configuration such as another set of 3 spacecrafts [5, 6]. Since the LISA configuration is fixed to three spacecrafts, we do not discuss such possibilities further. Note that our expressions in Eq.(2.11) are valid at the long wavelength limit of LISA relevant for the Galactic confusion background. At higher frequency regime, we expect the dependence of these terms in terms of harmonic coefficients to change [5, 6].

The off-diagonal element of the noise matrix S^B_{AE} is non-zero due to the $l = 4$ coefficients of the binary background. The above equations related to $S^B_{IJ}(\alpha, \beta, \gamma)$ are essentially same as eqs.(A13)-(A15) in Ref. [7]. Here, in comparison, we have rewritten the spin-weight harmonics in that paper with matrix elements $D^l_{sm}(\beta) = \langle ls|U(0, \beta, 0)^{-1}|lm\rangle$ with

$$ {}_{-s}Y_{lm}(\beta, \alpha)\sqrt{\frac{4\pi}{2l+1}} = D^l_{sm}(\beta)e^{im\alpha} \tag{2.12}$$

and elements $D^l_{sm}(\beta)$ given by the Jacobi polynomials $P^{(s+m,s-m)}_{l-s}$. When $s \geq m$, their explicit forms are [11]

$$D^l_{sm}(\beta) = (-1)^{l-s}\left[\frac{(l-s)!(l+s)!}{(l-m)!(l+m)!}\right]^{1/2}\left(\cos\frac{\beta}{2}\right)^{s+m}\left(\sin\frac{\beta}{2}\right)^{s-m} P^{(s+m,s-m)}_{l-s}(-\cos\beta)\,, \tag{2.13}$$

while for $s < m$, $D^l_{sm}(\beta) = (-1)^{s-m}D^l_{ms}(\beta)$

In the case of observations with LISA, the angle β is fixed to the value of $\pi/3$. This leads to the restriction that, in principle, one cannot separate information related to B_{00} and B_{20}. The angle α is given as $\alpha = 2\pi t$ with orbital time t in units of year (measured from the Autumn equinox). For the Galactic binary distribution $\rho(\boldsymbol{r})$ we use the triaxial model given in [12] and used in [7]. The relevant coefficients B_{lm} and D^l_{sm} are presented in Tables I and II.

While we primarily discuss the background from our galaxy, it is worth considering the possibility that anisotropies can exist due to gravitational wave emission from binaries in other galaxies of the Local group, such as the Andromeda galaxy (M31) or the Large Magellanic Cloud (LMC). Their contribution to the anisotropy $B(\theta, \phi)$ is roughly proportional to (mass)/(distance)^2. The characteristic distance is 10kpc for the Milky Way galaxy, 50kpc for LMC and 700kpc for M31. As for the mass, M31 is comparable to Milky Way, but LMC is $\sim 50^{-1}$ times smaller. Given these parameters, we find that the contribution to anisotropies of the gravitational wave background from other member of the local group is negligible. This is also apparent from the fact that the optical luminosity of these and other galaxies are much lower than the Milky Way.

III. EXTRACTION OF ANISOTROPY PARAMETERS

Having established the relation between components of the LISA data stream matrix and coefficients of the binary background anisotropy, we now discuss the individual measurement of these anisotropy coefficients based on various combinations of terms in the data matrix. First, we briefly outline the previous method based on the time modulation of the data stream and consider the relation between anisotropy coefficients there and the ones we discuss here.

A. Time Modulation of LISA Data

Previous studies on the measurement of anisotropies B_{lm} are based on the time modulation of the spectrum S^B_{AA} [4, 5, 6] (see also [11]). These techniques do not use (i) other modes S^B_{AE} or S^B_{EE} and (ii) the freedom to adjust one of the Euler angles, γ, a priori. In time modulation studies, the angle γ simply follows the motion of LISA and given as $\gamma = -2\pi t + \gamma_0$ where γ_0 is some constant angle (here, we put $\gamma_0 = 0$ for simplicity). We briefly follow the underlying idea behind time-modulation method and highlight certain problems for the signal extraction related to B_{lm}. The function S^B_{AA} can be expanded as $S^B_{AA}(t) = S^B_{AA}(\alpha = 2\pi t, \beta = \pi/3, \gamma = -2\pi t) = \sum_{n=-8}^{8} C_n e^{2\pi i n t}$. Since $C^*_n = C_{-n}$, as one is observing a real realization on the sky, we do not discuss C_n with $n < 0$. The explicit forms of the coefficients C_n are easily derived from Eqs.(2.11)

$$C_0 = \frac{2\sqrt{\pi}}{5}B_{00} + \frac{4}{7}\sqrt{\frac{\pi}{5}}D^2_{00}B_{20} + \frac{\sqrt{\pi}}{105}D^4_{40}B_{00} + \frac{2}{3}\sqrt{\frac{\pi}{70}}D^4_{44}\mathrm{Re}[B_{44}], \tag{3.1}$$



FIG. 1: Definition of the detector coordinate (X_D, Y_D, Z_D). The Z_D-axis is normal to the detector plane. A and E modes can be regarded as two L-shaped detectors rotated by 45°.

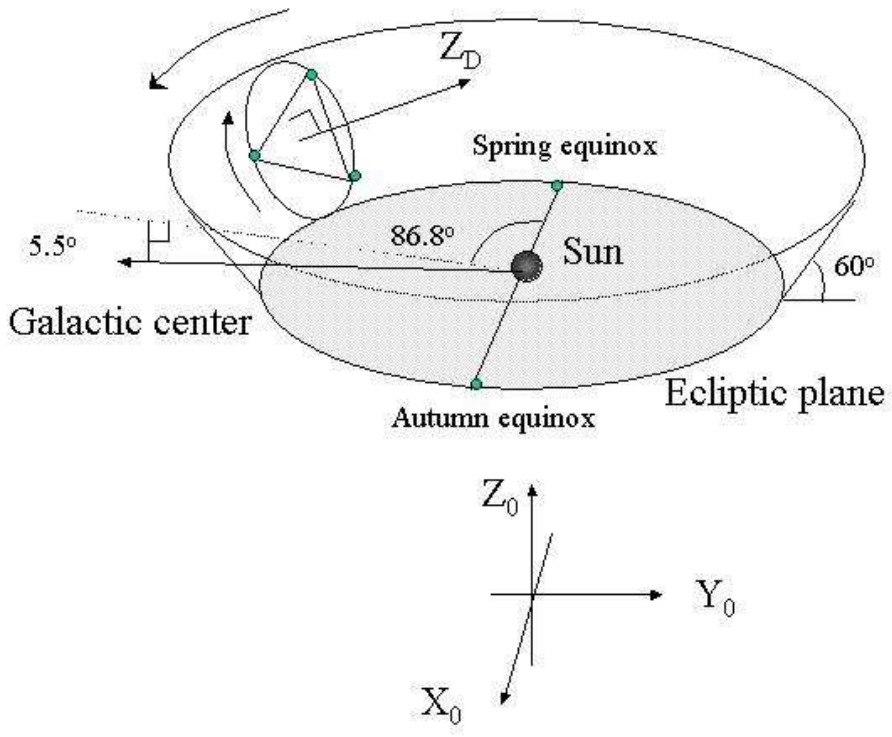

FIG. 2: Configuration of LISA and the definition of the fixed ecliptic coordinate (X_0, Y_0, Z_0). The Z_0-axis is normal to the ecliptic plane and X_0-axis is oriented to the autumn equinox from the Sun.

$$C_1 = \frac{4}{7}\sqrt{\frac{\pi}{5}} D^2_{01} B_{21} + \frac{\sqrt{\pi}}{105} D^4_{01} B_{41} - \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{43} B_{4-3}, \tag{3.2}$$

$$C_2 = \frac{4}{7}\sqrt{\frac{\pi}{5}} D^2_{00} B_{22} + \frac{\sqrt{\pi}}{105} D^4_{02} B_{42} + \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{42} B_{4-2}, \tag{3.3}$$

$$C_3 = \frac{\sqrt{\pi}}{105} D^4_{03} B_{43} - \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{41} B_{4-1}, \quad C_4 = \frac{\sqrt{\pi}}{105} D^4_{04} B_{44} + \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{40} B_{40}, \tag{3.4}$$

$$C_5 = -\frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{4-1} B_{41}, \quad C_6 = \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{4-2} B_{42}, \quad C_7 = -\frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{4-3} B_{43}, \quad C_8 = \frac{1}{3}\sqrt{\frac{\pi}{70}} D^4_{4-4} B_{44}. \tag{3.5}$$

Assuming that the detector noise S^D_{AA} is significantly smaller than the background S^B_{AA} in a frequency bandwidth Δf, the signal-to-noise ratio for each coefficients $(n \neq 0)$ is given as [4, 6]

$$\left(\frac{S}{N}\right)_n = \sqrt{2}\frac{|C_n|}{C_0}\sqrt{\Delta f T}. \tag{3.6}$$

where T is the observational period. Statistics for the measurement of the time dependent signal C_n $(n \neq 0)$ would be largely different from that of the constant part C_0. The coefficients C_n are complex numbers but their phases depend on the choice of the orientation of the X_0-axis that is somewhat arbitrary in the ecliptic plane. Therefore, we summed up the signal to noise ratios of their real and imaginary parts in Eq. (3.6). The numerical prefactor of $\sqrt{2}$ comes from the fact that we assume the noise contributions to the real and imaginary parts of these coefficients are related to the total noise, N_T such that $N_R = N_I = N_T/\sqrt{2}$ without correlation between them. For our model parameters related to the binary distribution, we have

$$\left(\frac{S}{N}\right)_1 = 50, \left(\frac{S}{N}\right)_2 = 73, \left(\frac{S}{N}\right)_3 = 3.6, \left(\frac{S}{N}\right)_4 = 2.2, \left(\frac{S}{N}\right)_5 = 0.69, \left(\frac{S}{N}\right)_6 = 0.76, \left(\frac{S}{N}\right)_7 = 0.23, \left(\frac{S}{N}\right)_8 = 0.084, \tag{3.7}$$

with $T = 10^8$sec and $\Delta f = 10^{-3}$Hz. Thus, one can obtain only C_1 and C_2 with sufficient statistical significance. The above signal-to-noise ratios are consistent with previous analyses when considering the difference between models for the Galaxy density distribution between these calculations and the present one [4]. Since C_1 and C_2 depend on certain combinations of B_{lm}, one cannot separate out the multipole moment coefficients related to the gravitational wave background by simply measuring the time modulation components in the Fourier space. Moreover, in terms where certain B_{lm} coefficients are simply proportional to C_n coefficients, especially when $n > 5$, the dependence is significantly reduced through small coupling coefficients. For example, the information related to $B_{4\pm3}$ appears in C_7 with the factor $-D^4_{4-3}\sqrt{\pi/70}/3 = -0.0044$. Once can consider combinations of C_n to extract a certain B_{lm}, but, again for example for the case with $B_{4\pm3}$, the dependence in C_3 is through $D^4_{03}\sqrt{\pi}/105 = -0.0081$ and in C_1 through $-D^4_{43}\sqrt{\pi/70}/3 = -0.036$. The former factor (in C_7) is smaller than the latter (note $D^4_{4-3} \ll D^4_{40}, D^4_{43}$; Table II), but information related to B_{43} in the latter remains to be degenerate with other B_{lm} coefficients such that one cannot easily find the necessary combinations. The situation is also similar for $B_{4\pm2}$ or $B_{4\pm4}$. The factor $D^4_{4-4}\sqrt{\pi/70}/3$ in C_8 is extremely small, and it is impossible to determine B_{44} form the coefficient C_8.

From these examples, we learn two things: We should try to improve the signal-to-noise ratio for B_{lm} coefficients by taking a suitable combination with respect to the matrix element D^4_{lm}, and handle the degeneracy of B_{lm} coefficients with the use of other modes.

In the next subsection, we study a method for signal analysis where we pay special attention to these two points.

B. Correlation Analysis

We use the correlation analysis $\int S_{AE}(t)dt$ to measure the parameter B_{4m}. By setting $\gamma = -\pi/2m't + \pi/8$ $(m' \geq 0)$, for each m' from 0 to 4, a priori — since we have this freedom to specify this angle before hand — one obtains, under the scenario that $\alpha = 2\pi\, t$ and after integrating the signal $S_{AE}(t)$ over an observational period T (an integer in units of one year),

$$\begin{aligned} \left\langle S^B_{AE}\right\rangle^{m'}_R &\equiv \int S^B_{AE}(t)\, dt \\ &= \int dt\, \frac{2\sqrt{\pi}}{3\sqrt{70}} \sum_m D^4_{4m} \mathrm{Im}[B_{4m} e^{i(2\pi(m-m')t+\pi/2)}] \\ &= -\frac{2\sqrt{\pi}}{3\sqrt{70}} D^4_{4m'} \mathrm{Re}[B_{4m'}]\,, \end{aligned} \tag{3.8}$$

while the imaginary component of the same quantity can be obtained by setting $\gamma = -\pi/2m't$ such that $\left\langle S^B_{AE}\right\rangle^m_I \propto \mathrm{Im}[B_{4m}]$. Thus, the substitution for γ has the advantage that one can now individually get real and imaginary parts of B_{4m}, while at the same time, also making use of the substantially large coupling coefficients of D^4_{4m} $(m \geq 0)$ that are associated with harmonic coefficients.

When we neglect the detector noise and the frequency dependence of anisotropies, which would be tolerable for the present study, the signal-to-noise ratio of the correlation analysis, for an individual $l = 4$ and m coefficient, is

$$(\mathrm{S/N})_{4m} = \left(\int dt \int df \frac{[\left\langle S^B_{AE}\right\rangle^m]^2}{S_{AA}(t)S_{EE}(t)}\right)^{1/2}, \tag{3.9}$$

where we have now combined the real and imaginary parts $[\left\langle S^B_{AE}\right\rangle^m]^2 = [\left\langle S^B_{AE}\right\rangle^m_R]^2 + [\left\langle S^B_{AE}\right\rangle^m_I]^2$. We have numerically calculated these signal-to-noise ratios for each m value using the same density distribution model for the galactic

l, m	0,0	2,0	2,1	2,2	4,0	4,1	4,2	4,3	4,4
B_{lm}/B_{00}	1	-0.243	-0.292+0.077i	-0.647-0.038i	0.052	-0.076+0.076i	0.289-0.012i	-0.329-0.073i	0.504+0.061i

TABLE I: Spherical harmonic coefficients of the Galactic binary background. Note that $B_{l-m} = (-1)^m B^*_{lm}$.

$D^2_{0,-2}$	$D^2_{0,-1}$	$D^2_{0,0}$	$D^2_{0,1}$	$D^2_{0,2}$
0.459	0.530	-0.125	-0.530	0.459

$D^4_{0,-4}$	$D^4_{0,-3}$	$D^4_{0,-2}$	$D^4_{0,-1}$	$D^4_{0,0}$	$D^4_{0,1}$	$D^4_{0,2}$	$D^4_{0,3}$	$D^4_{0,4}$
0.294	0.480	0.222	-0.303	-0.289	0.303	0.222	-0.480	0.294

$D^4_{4,-4}$	$D^4_{4,-3}$	$D^4_{4,-2}$	$D^4_{4,-1}$	$D^4_{4,0}$	$D^4_{4,1}$	$D^4_{4,2}$	$D^4_{4,3}$	$D^4_{4,4}$
0.004	0.019	0.062	0.152	0.294	0.456	0.558	0.516	0.316

TABLE II: Matrix elements $D^l_{sm}(\beta)$ for $\beta = \pi/3$.

binaries as before and we obtain following values for $(S/N)_{4m}$ for the measurement of B_{4m} coefficients, separately, as

$$(S/N)_{40} = 1.1, \quad (S/N)_{41} = 3.7, \quad (S/N)_{42} = 12, \quad (S/N)_{43} = 13, \quad (S/N)_{44} = 12, \tag{3.10}$$

when $\Delta f = 10^{-3}$Hz and $T = 10^8$sec. Thus, as estimated, we expect one can estimate the coefficients B_{42}, B_{43} and B_{44} accurately, while upper limits can be established for B_{40} and B_{41}. Then, using the previous time modulation method, one can further estimate B_{21} form C_1 coefficient and B_{22} from C_2 coefficient. Since coefficients C_1 and C_2 are dominated by B_{12} and B_{22} respectively, this determination can be carried out with sufficient signal-to-noise ratio.

So far, we have studied the correlation analysis for estimating B_{4m} individually for all m values and the combination of time modulation related to S^B_{AA} and the correlation analysis to extract certain the coefficients related to the quadrupole. One can also use the time modulation method alone, but with combinations of S^B_{AA}, S^B_{EE}, and S^B_{AE}. An example is the modulation of $S^B_{AA} - S^B_{EE}$. Again, the freedom related to the angle γ is important. For example by setting $\gamma = 2\pi t(-m/4 + 2)$ or $2\pi t(-m/4 + 2) + \pi/8$, we can estimate the real and imaginary parts of B_{4m} from the coefficient C_8 related to the combination $S^B_{AA} - S^B_{EE}$. By making numerical estimates, we find that the signal-to-noise ratio for such a measurement is similar to the one estimated above with the correlation analysis.

While the combination with time modulation for S^B_{AA} alone do lead to certain coefficients of B_{4m}, we find that the correlation analysis improves the correlation method by providing a mechanism to extract all coefficients. Moreover, the correlation method compliments techniques related to the time modulation and we find that, in combination, the methods can be used to extract most coefficients related to the $l = 2$ and 4 moments of the galactic distribution of binaries. The only coefficients that are not independently measured is B_{00} and B_{20}, though the two can be measured in combination as a sum. As mentioned earlier, signal analysis for the C_0 mode is different from other C_n modes with $n \neq 0$. For this purpose, data streams other than A and E modes, *e.g.* Sagnac, would be important to calibrate the detector noise [13].

IV. SUMMARY

In this paper, we have discussed spatial fluctuations in the gravitational wave background arising from unresolved Galactic binary sources, such as close white dwarf binaries, due to the fact the this galactic source distribution, when projected on the sky, is anisotropic. We introduce a spherical harmonic analysis of this anisotropy based on a correlation study of the two data streams of LISA and propose the measurement of individual spherical harmonic coefficients related to the hexadecapole moment ($l = 4$), in addition to coefficients of the quadrupole ($l = 2$).

The proposed technique complements and improves over previous suggestions in the literature to measure the gravitational wave background anisotropy based on the time modulation of the single data stream (*e.g.* $S^B_{AA}(t)$) as LISA orbits around the Sun and restricted only to combinations of spherical harmonic coefficients with no ability to separate them. The correlation analysis, by making use of a single freedom related to the rotation angle of detectors in the detector plane or similarly how data are combined, provides a method to independently extract multipole coefficients of the hexadecapole moment of the background. The information related to the quadrupole comes from the correlation analysis in combination with the time modulation. The only independently undetermined coefficients turn out to be that of the monopole and the $m = 0$ mode of the quadrupole, though the two can be determined as a sum.

With LISA, we have shown that certain coefficients of the hexadecapole can be measured with signal-to-noise ratios at the level of 10 and above. While LISA will present a first step towards a correlation analysis of the gravitational wave background, future missions are likely to exploit this in detail both as a source of signal, to extract spatial information, and noise, to decrease noise to detect almost isotropic backgrounds such as the one related to primordial gravitational waves. This would certainly be the case at low frequencies as the foreground is likely to be the dominant source of anisotropy. At few mHz frequencies, the fluctuation amplitude related to the extragalactic component is expected to be at the level of a few percent, but restricted to arcminute angular scales where galaxy density field is observed to vary. At μHz frequencies, where the merging massive black holes are likely to be the domiant foreground source, the anisotropy will be dominated by the shot-noise related to the finite number density of such binaries on the sky. On the other hand, the anisotropy of the primordial gravitational wave background is expected to have a pattern close to that of the cosmic microwave background, with a fluctuation level of $\delta \sim 10^{-5}$, at large angular scales. A confirmation of their similarity in anisotropy can be used as a proof on the primordial nature of the background. For a direct detection of spatial fluctuations in the gravitational wave background, in the optimistic case where the detector noise is dominated by the monopole mode of the background, one is forced to gravitational wave frequencies at the level of $f \sim \Delta f \sim 10^4(\mathrm{SN}/10)^2(\delta/10^{-5})^{-2}(T/3\mathrm{yr})\mathrm{Hz}$. Thus, for a detection of the anisotropy at a level $\delta \sim 10^{-5}$ over a realistic observational period with significant signal to noise ratio, the relevant frequencies are at $f \gtrsim 10\mathrm{kHz}$. Interestingly, at this high end of the gravitational wave spectrum, there are no viable astrophysical sources and suggests that, in future, one may in fact be able to extract anisotropy associated with the primordial gravitational wave background.

Acknowledgments

This work was supported in part by DoE DE-FG03-92-ER40701, a senior research fellowship from the Sherman Fairchild foundation (AC), NASA grant NAG5-10707, and the JSPS fellowship to research abroad (NS).

[1] P. L. Bender *et al.*, *LISA Pre-Phase A Report,* Second edition, July 1998.

[2] R. F. Webbink and Z. Han, AIP Conf. Proc. 456: Laser Interferometer Space Antenna, Second International LISA Symposium on the Detection and Observation of Gravitational Waves in Space. (AIP, New York, 1998) p. 61; G. Nelemans, L. R. Yungelson, and S. F. Portegies Zwart Astron. & Astrop., **375**, 890 (2001); N. Seto, Mon. Not. Roy. Astron. Soc. **333**, 469 (2002); A. Cooray, A. Farmer and N. Seto, Astrophys. J. **601**, L47 (2004).

[3] G. Nelemans, L. R. Yungelson, S. F. Portegies Zwart and F. Verbunt, Astron. & Astrop., **365**, 492 (2001); N. J. Cornish and S. L. Larson, Phys. Rev. D **67**, 103001 (2003); D. Hils, P. L. Bender and R. F. Webbink, Astrophys. J. **360**, 75 (1990).

[4] G. Giampieri and A. G. Polnarev Mon. Not. R. Astron. Soc. **291**, 149 (1997); G. Giampieri and A. G. Polnarev, Class. Quant. Grav. **14**, 1521 (1997).

[5] N. J. Cornish, Class. Quant. Grav. **18**, 4277 (2001)

[6] C. Ungarelli and A. Vecchio, Phys. Rev. D **64**, 121501 (2001).

[7] N. Seto, arXiv:gr-qc/0403014.

[8] C. Ungarelli and A. Vecchio, Phys. Rev. D **63**, 064030 (2001) [arXiv:gr-qc/0003021]; N. Seto, S. Kawamura and T. Nakamura, Phys. Rev. Lett. **87**, 221103 (2001) [arXiv:astro-ph/0108011].

[9] B. Allen, arXiv:gr-qc/9604033; M. Maggiore, Phys. Rept. **331**, 283 (2000) [arXiv:gr-qc/9909001].

[10] T. A. Prince, M. Tinto, S. L. Larson and J. W. Armstrong, Phys. Rev. D **66**, 122002 (2002)

[11] B. Allen and A. C. Ottewill, Phys. Rev. D **56**, 545 (1997) [arXiv:gr-qc/9607068].

[12] J. Binney, O. Gerhard and D. Spergel, Mon. Not. Roy. Astron. Soc. **288**, 365 (1997)

[13] M. Tinto, J. W. Armstrong and F. B. Estabrook, Phys. Rev. D **63**, 021101 (2001); C. J. Hogan and P. L. Bender, Phys. Rev. D **64**, 062002 (2001) [arXiv:astro-ph/0104266].